



1/8
AUS920000610US2

Figure 1

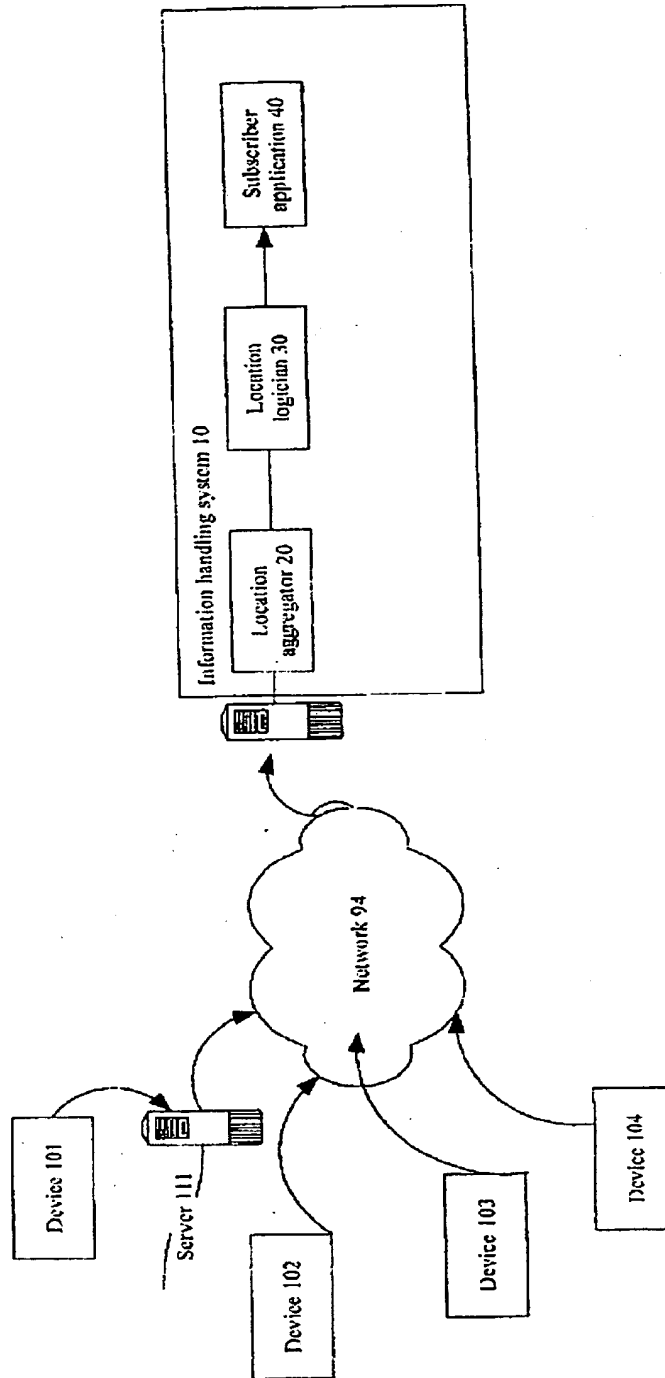


2/8
AUS920000610US2

Figure 2

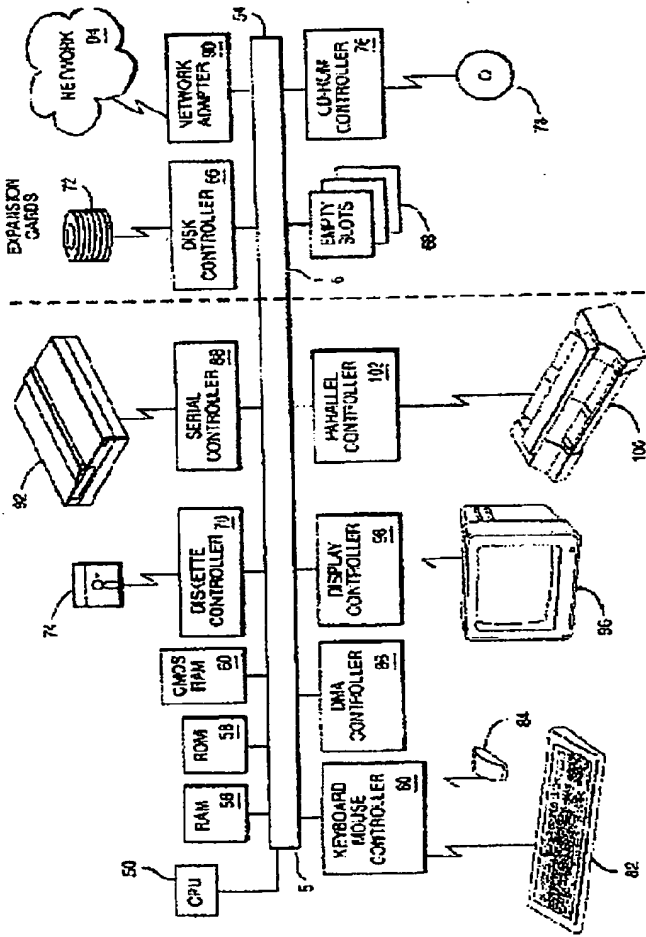

4/8
AUS920000610US2

Figure 4

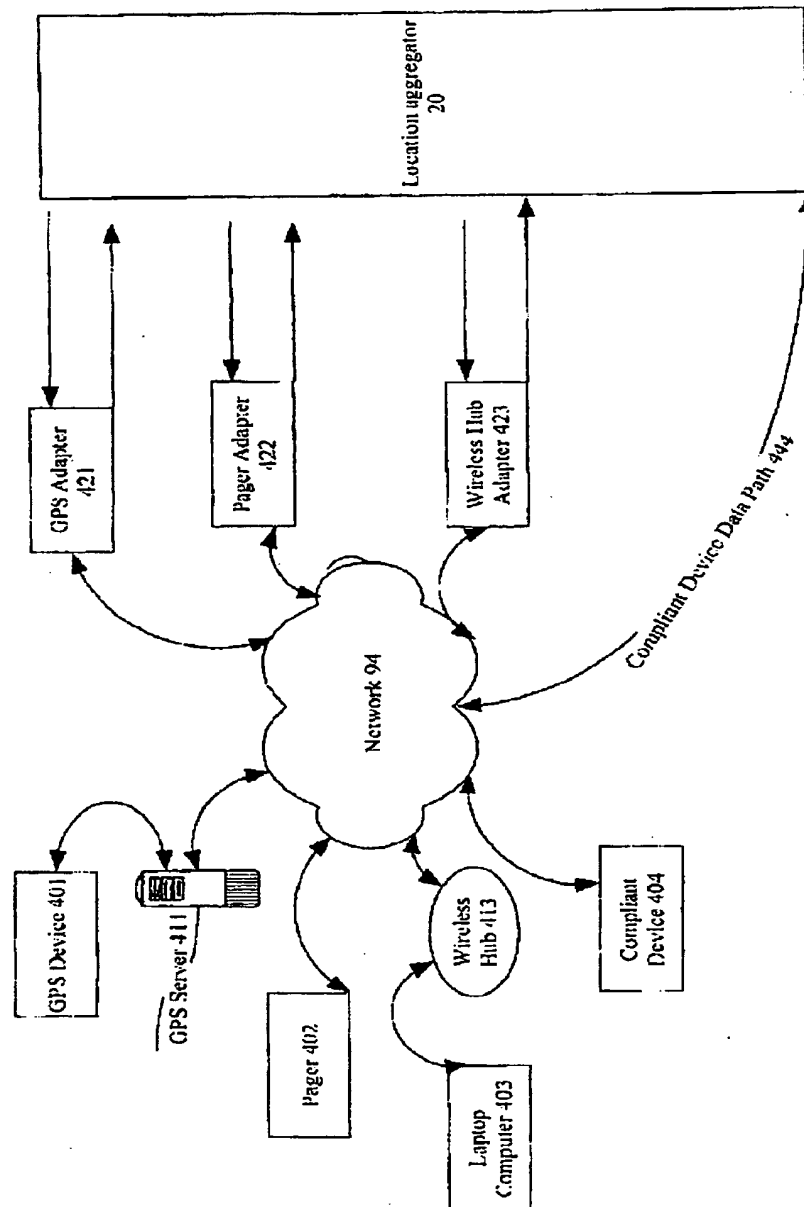

5/8
AUS920000610US2


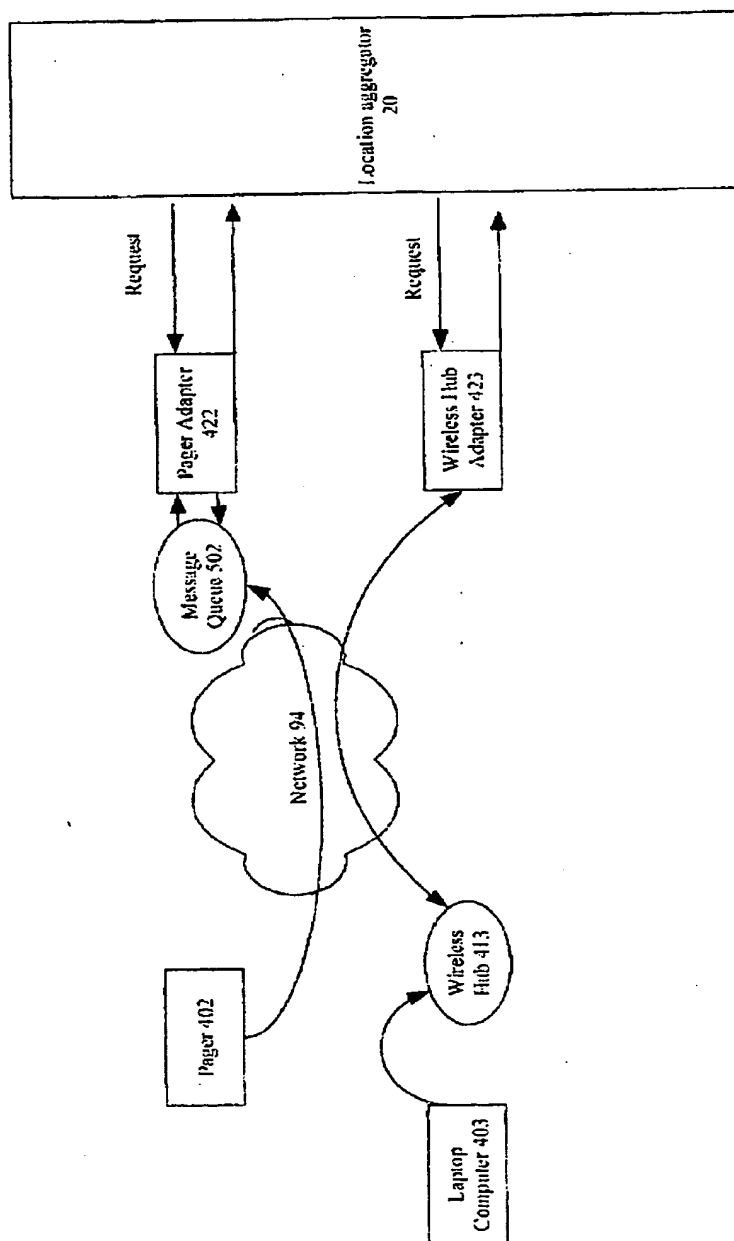


Figure 5


6/8
AUS920000610US2

Figure 6

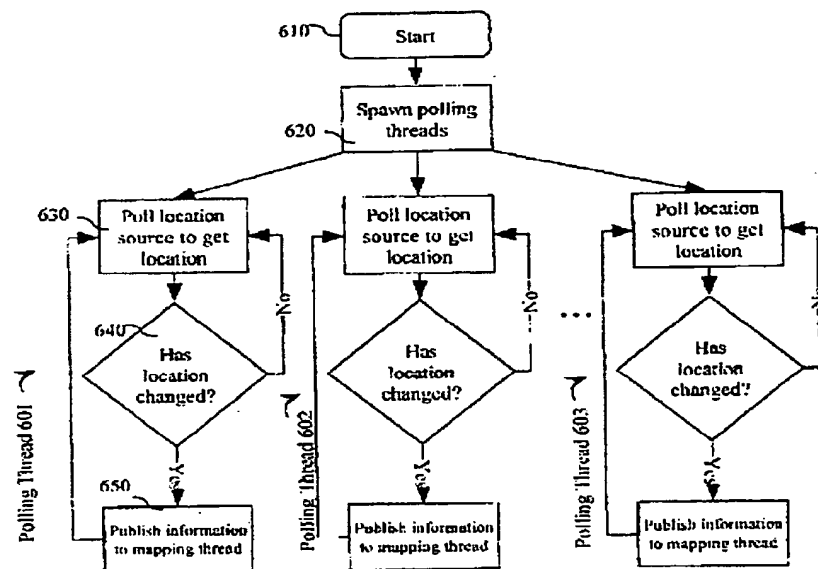

7/8
AUS920000610US2

Figure 7

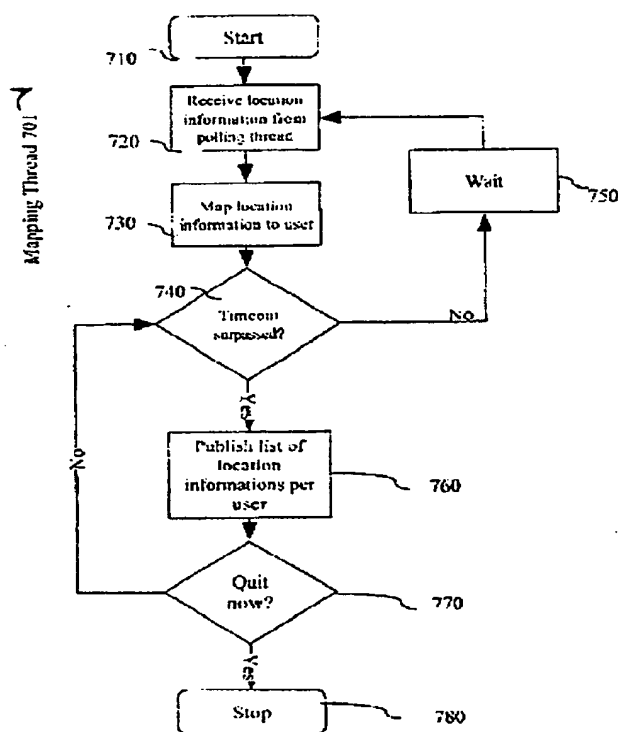

8/8

AUS920000610US2

Figure 8

SAMPLE LOCATION XML DOCUMENT

```
<LocationInformation>
- <MobileDevice TrackID="1234567890" RequestTime="20000626115751+-0800" ErrorCode="0">
- <Geographic Velocity="0" PositionTime="20000626115751+-0800">
- <GeodeticDatum>
- <WGS-84>
  <LatLong PositionFormat="IDM80" Latitude="N374820" Longitude="W1222738" />
  <WGS-84>
</GeodeticDatum>
<HeightDatum HeightFormat="meters" HeightValue="500" />
<Region RadiusFormat="meters" InnerRadius="0" OuterRadius="100" StartAngle="0" StopAngle="360"
LevelOfConfidence="100" />
</Geographic>
<TowerID PositionTime="20000626115751+-0800" Name="95110" Type="ZIP" />
</MobileDevice>
</LocationInformation>
```

Annotations in the diagram:

- 811 points to the opening tag `<LocationInformation>`.
- 832 points to the `RequestTime` attribute value `"20000626115751+-0800"`.
- 833 points to the `PositionTime` attribute value `"20000626115751+-0800"`.
- 871 points to the `PositionTime` attribute value `"20000626115751+-0800"`.
- 872 points to the `Name` attribute value `"95110"`.